
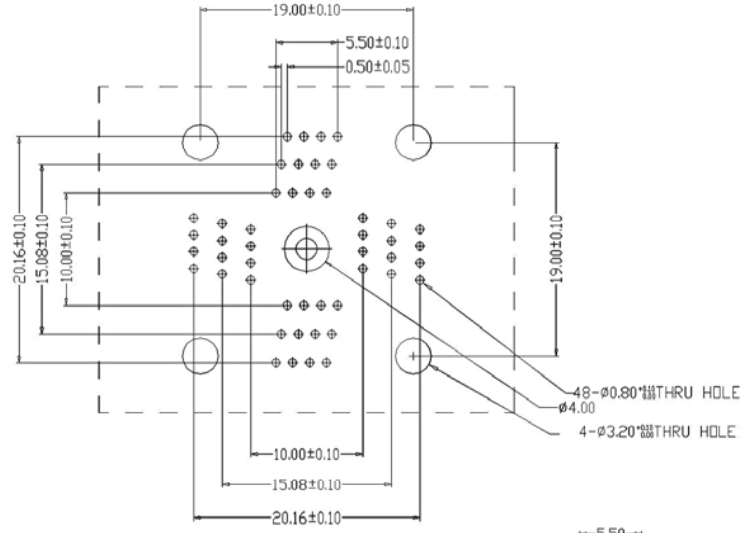


A


B

Autodesk 教育版产品制作

D

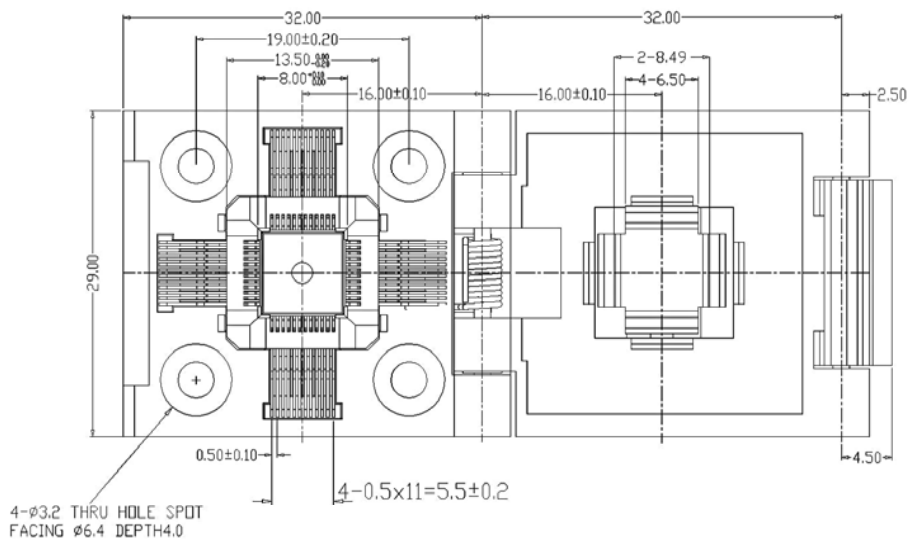

PCB PATTERN (Top View)




APPL ICABLE IC S=2/1




接触部详细图 (S=4/1)  
Detail of Contact point

Insertion IC 插入方向

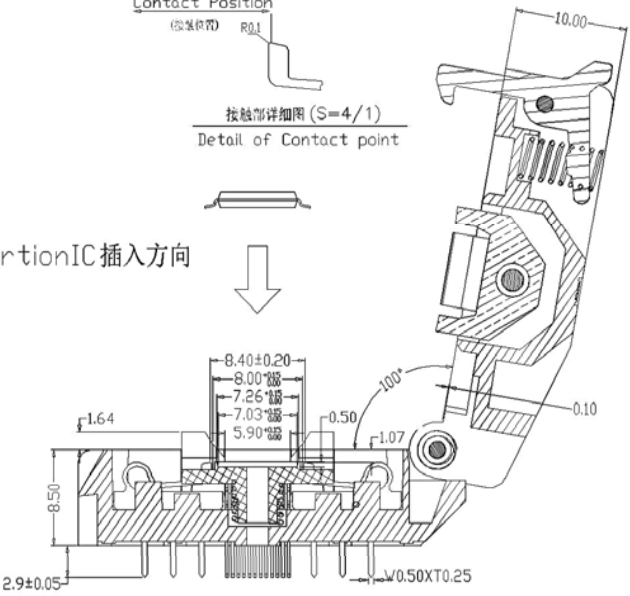


SEC.A-A

S=2/1



外形参考图  
DIMENSIONS



- 1. MATERIAL AND FINISH**
1. SOCKET LID : PEI
  2. SOCKET BASE : PEI
  3. CONTACTS : BeCu, SELECTIVE Au-AuFLASH OVER NI PLATING
  4. SPRINGS : STAINLESS STEEL , PASSIVATED
- 2. SPECIFICATION**
1. INSULATION RESISTANCE : 1000Mohm or more at 100VDC.
  2. DIELECTRIC WITHSTANDING VOLTAGE: 100V AC for one minute.
  3. CONTACT RESISTANCE: 30mohm or less at 10mA, 20mV or less.
  4. OPERATION TEMPERATURE : -55°C ~ +170°C
  5. CONTACT FORCE: 15g-180g with contact travel distance between 0.2mm-0.9mm.

△ C				DWG NO			PART NAME	QFP-48-0.5-01
△ B				MATERIAL		SCALE	TITLE	QFP-48-0.5-01
△ A				QTY	1	UNIT		mm
REV	DESCRIPTION	DATE	CHECK	SHEET	1 OF 1	REV		01
APPLICATION				APPROVE		DATE		
ANGLES	FINISH	ROUGH	ME	0.X:±0.1	CHECK	DATE		
ALL UNSPECIFIED CHAMFERS: C0.2				TRIC	0.XX:±0.05	DEGK	DATE	20140512

